



安装外形图 Overall dimension




型号 Model	H
SWIM S1-025	248
SWIM S1-035	
SWIM S1-050	
SWIM S1-075	
SWIM S1-100	251
SWIM S1-150	

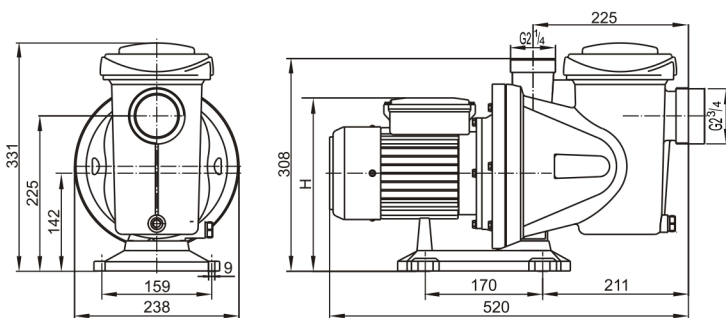

www.tuv.com
ID 1419052855





海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

性能曲线 Performance curves

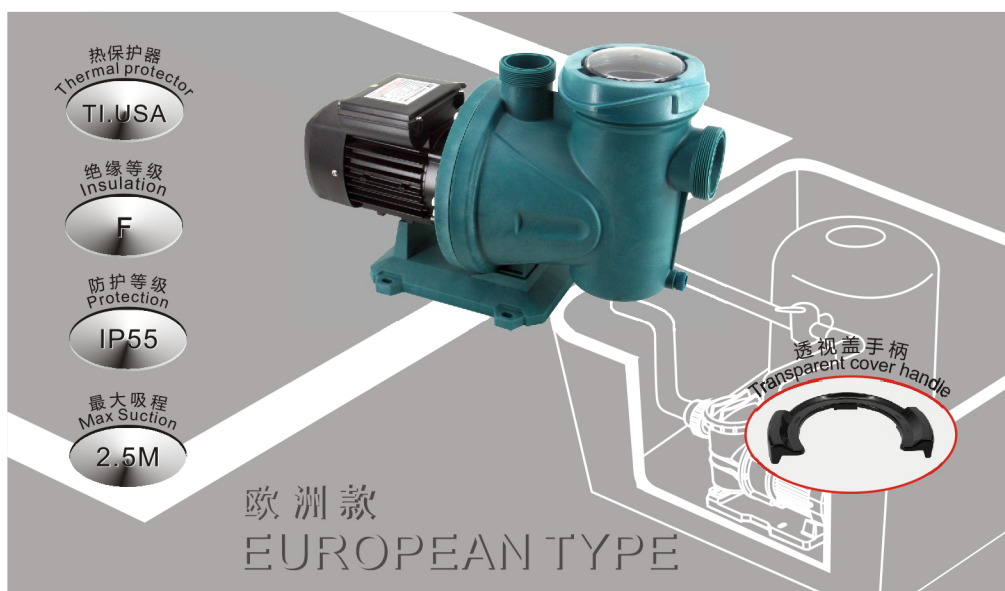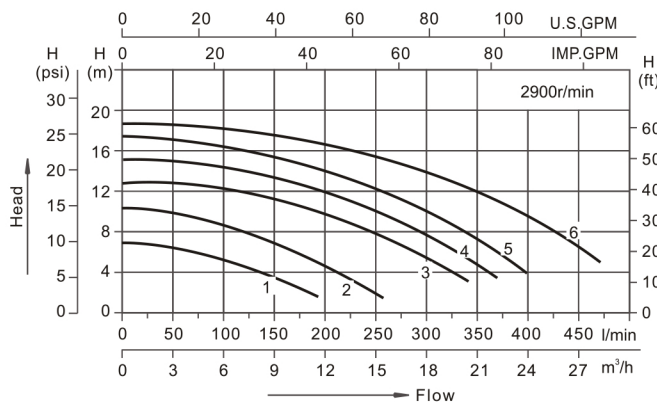

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 (curves)	电压/频率 V/Hz	输入功率 Power(P ₁) kW HP	电流 (Amps)	接头尺寸 Fitting size (mm) Inlet Outlet	毛重 G.W (Kg)	包装尺码 Packing size (mm)
SWIM S1-025	195	7	1	220-240/50	0.37 0.50	1.9	60.3or63 48.5or50	9.6	575×275×405
SWIM S1-035	255	10	2	220-240/50	0.55 0.75	2.7	60.3or63 48.5or50	10.7	575×275×405
SWIM S1-050	340	12.5	3	220-240/50	0.75 1.0	3.8	60.3or63 48.5or50	11.3	575×275×405
SWIM S1-075	370	15	4	220-240/50	0.9 1.2	4.6	60.3or63 48.5or50	12.5	575×275×405
SWIM S1-100	390	17.5	5	220-240/50	1.1 1.5	5.8	60.3or63 48.5or50	13	575×275×405
SWIM S1-150	470	18.5	6	220-240/50	1.5 2.0	7.0	60.3or63 48.5or50	13.8	575×275×405

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

