


安装外形图 Overall dimension



型号 Model	L	H
SWIM 2-120	603	264
SWIM 2-150		267
SWIM 2-200		278
SWIM 2-250		288
SWIM 2-300	616	285
SWIM 2-400	640	288
SWIM S2-120	603	264
SWIM S2-150		267
SWIM S2-200		278
SWIM S2-250		288
SWIM S2-300	616	285
SWIM S2-400	640	288

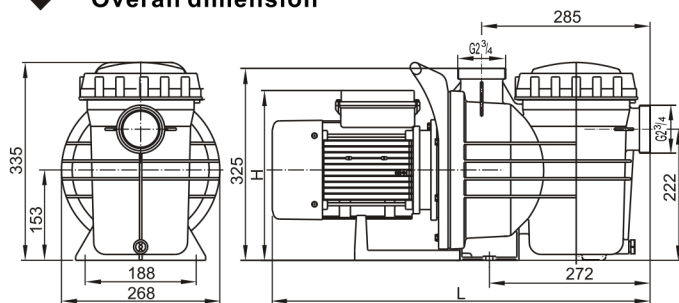

泳池循环过滤
Recirculation of water in swimming pool equipment

特点

- * 此系列产品是我司参考市场上使用的习惯尺寸后，完全独立开发的；
- * 一体式提手，安装便捷。

Features

- * This series product is us completely independent development, the overall size is reference to the market habit.
- * Integral structure handle, convenient installation.



工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

性能曲线 Performance curves

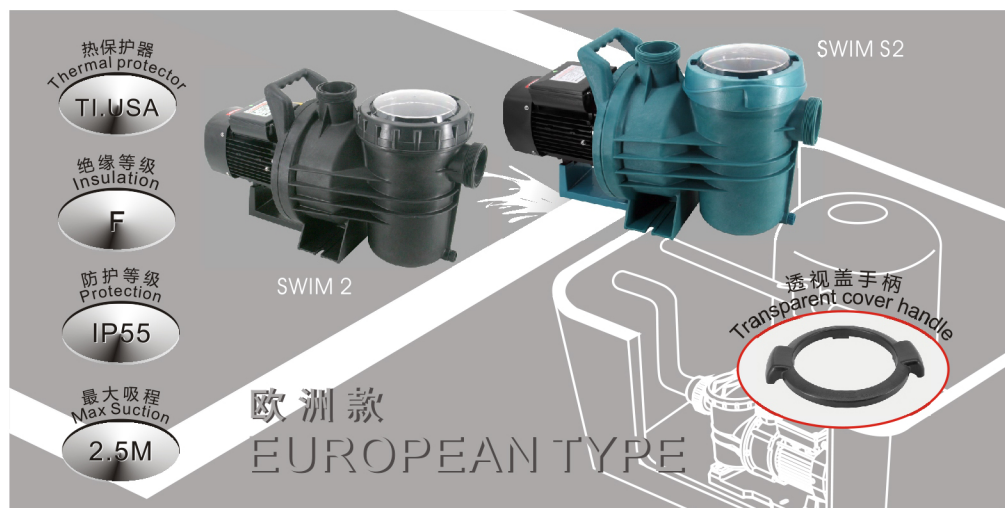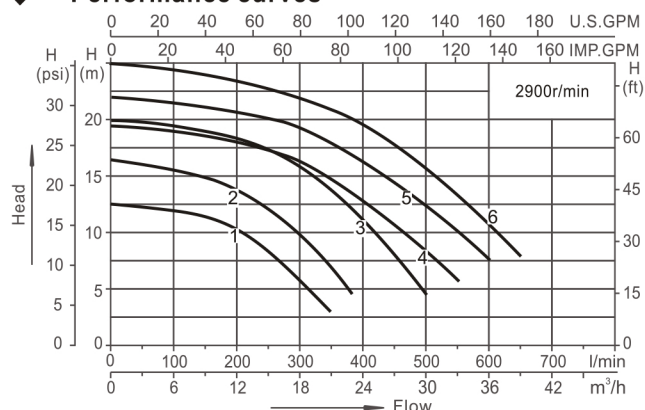

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P1) kW HP	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
SWIM 2-120	350	12.5	1	220-240/50	0.9 1.2	4.6	60.3or63	15.8	675×315×420
SWIM 2-150	380	16.5	2	220-240/50	1.1 1.5	5.2	60.3or63	16.5	675×315×420
SWIM 2-200	500	20	3	220-240/50	1.5 2.0	7.0	60.3or63	18.8	675×315×420
SWIM 2-250	560	19.5	4	220-240/50	1.85 2.5	8.6	60.3or63	20.5	675×315×420
SWIM 2-300	600	22	5	220-240/50	2.2 3.0	10	60.3or63	22	675×315×420
SWIM 2-400	650	25	6	220-240/50	3.0 4.0	14	60.3or63	25.3	700×315×420
SWIM S2-120	350	12.5	1	220-240/50	0.9 1.2	4.6	60.3or63	15.8	675×315×420
SWIM S2-150	380	16.5	2	220-240/50	1.1 1.5	5.2	60.3or63	16.5	675×315×420
SWIM S2-200	500	20	3	220-240/50	1.5 2.0	7.0	60.3or63	18.8	675×315×420
SWIM S2-250	560	19.5	4	220-240/50	1.85 2.5	8.6	60.3or63	20.5	675×315×420
SWIM S2-300	600	22	5	220-240/50	2.2 3.0	10	60.3or63	22	675×315×420
SWIM S2-400	650	25	6	220-240/50	3.0 4.0	14	60.3or63	25.3	700×315×420

