


安装外形图 Overall dimension





型号 Model	E
SHP100	1 1/2-11.5NPT or G 1 1/2
SHP120	
SHP150	
SHP200	

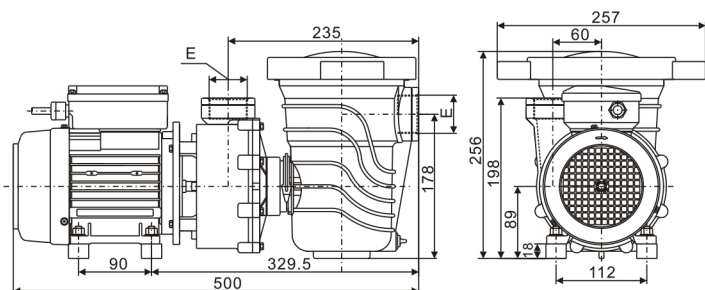

泳池循环过滤
Recirculation of water in
swimming pool equipment

性能曲线 Performance curves

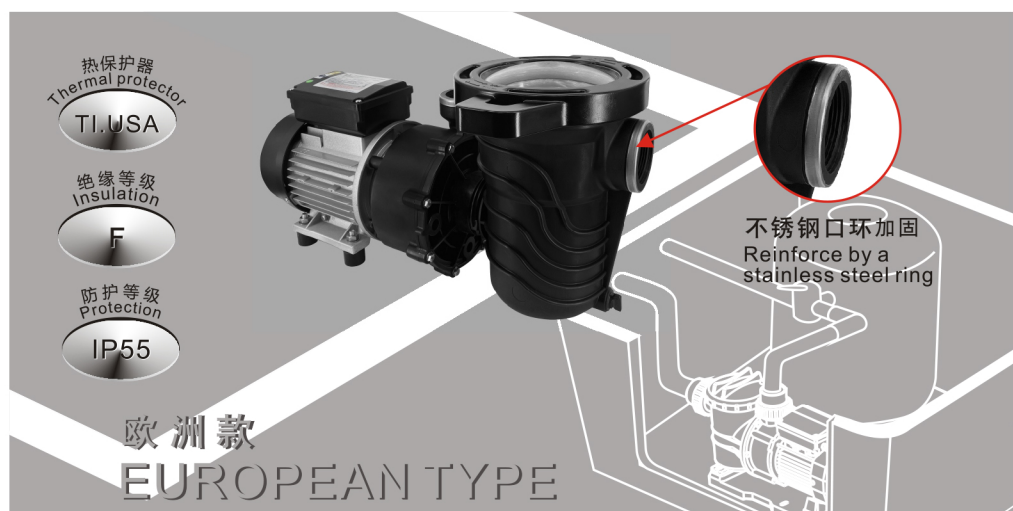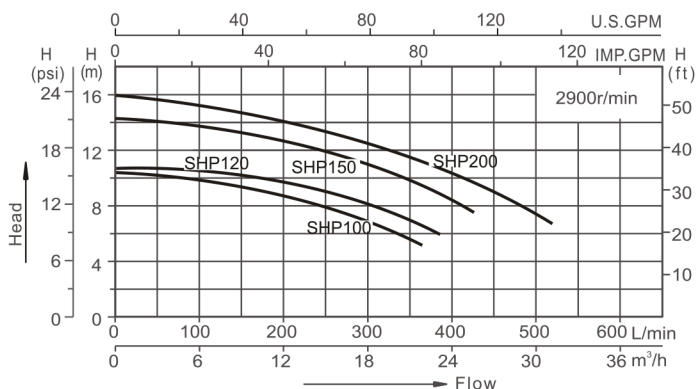

特点:

- * 经济、高效、可靠
- * 泵进出水口可选: 1 1/2-11.5NPT 或 G 1 1/2
- * 适用于大、中型泳池水循环系统、装饰性水池等循环系统的液体循环及过滤。

Features:

- * Economical, Efficient, Reliable
- * Inlet and outlet : 1 1/2-11.5NPT or G 1 1/2
- * Apply to medium and large size swimming pools and decoration pool...etc.

技术参数列表 Technical parameter list

型 号 Model	最大流量 Qmax (L/min)	最大扬程 Hmax (m)	输入功 率 Power(P1)		电压/频率 (V/Hz)	电流 (Amps)	包装尺码 Packing size (mm)
			kW	HP			
SHP100	360	10.5	0.75	1.0	220-240/50	3.8	550× 240× 320
SHP120	380	11.5	0.9	1.2	220-240/50	4.6	550× 240× 320
SHP150	420	14.5	1.1	1.5	220-240/50	5.2	550× 240× 320
SHP200	510	16	1.5	2.0	220-240/50	7.0	550× 240× 320

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa

