



安装外形图 Overall dimension

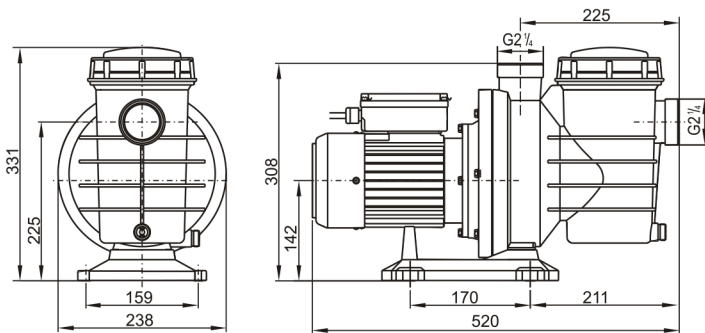

性能曲线 Performance curves

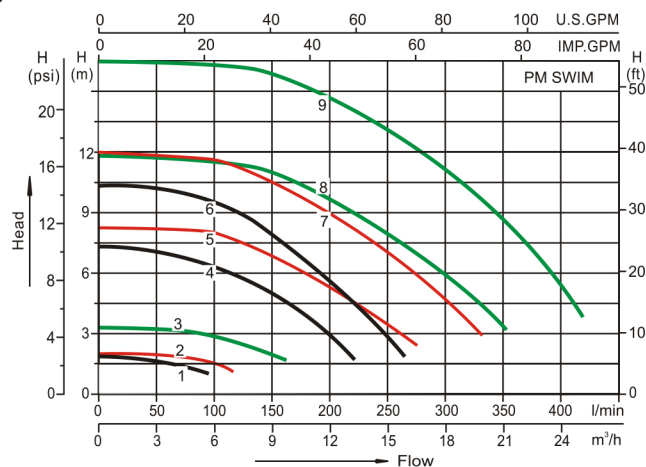

功能

* 控制盒面带转速显示框,有3档速度按钮(高速1/中速2/低速3),速度设置按钮(SET),停机按钮(0),电源及错误指示灯。

* 接通电源,电源指示灯闪烁,按任意速度按钮,电泵在高速档运行,运行约5分钟后才可以在高(1)、中(2)、低(3)之间切换。

* 电泵速度出厂标准设定:高速档(1):2850rpm,中速档(2):2400rpm,低速档(3):1200rpm;电泵速度可在1000~2850rpm之间通过速度设置键任意设定。

Function

* On the operation panel equipped with speed display, three speed button:High (1) / Mid(2) / Low(3), speed set button: SET, stop button:0, power and error light.

* Input power, power light flicker, The pump will running with high speed, When push anyone speed button. After running 5 minutes, The speed can be change between. High speed, middle speed and low speed.

* The standard speed of the pump: High speed1:2850rpm, Middle speed 2:2400rpm Low speed3:1200rpm. Also the pump can be set any speed from 1000rpm to 2850rpm

特点

- * 易于操作及使用
- * 温升低、噪音低
- * 体积小、寿命长

Features

- * Easy to operate and use
- * Low temperature arise, low noise
- * Small size, long life

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max.working pressure: 0.3MPa



技术参数列表 Technical parameter list

型号 Model	转速 Speed (r/min)	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P ₁) kW	电流 (Amps)	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
PM SWIM035	2850	265	10.5	1	220/50	0.48	2.1	48.5or50	10.7	560×275×390
	2400	220	7.5	4		0.3	1.3			
	1200	95	2	6		0.06	0.5			
PM SWIM050	2850	330	12	2		0.65	2.9	48.5or50	11.3	560×275×390
	2400	275	8.5	5		0.42	1.8			
	1200	120	2.1	7		0.08	0.6			
PM SWIM100	2850	420	16.5	3		1.1	5	48.5or50	13	560×275×390
	2400	350	12	8		0.7	3			
	1200	160	3.3	9		0.12	0.8			

