


安装外形图 Overall dimension



型 号 Model	L	H
WEQ400T	715	359
WEQ500T		
WEQ750T		
WEQ1000T		
WEQ1500T	770	378
WEQ2000T	811	
WEQ2500T		

注：
需选配铸铝底脚，请联系我司业务人员。
If you need cast aluminum foot, please
contact our sales staff.

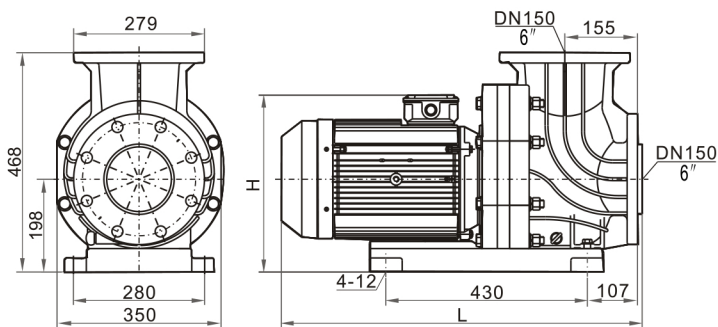

泳池循环过滤
Recirculation of water in
swimming pool equipment

特点：

1. 进出口法兰为国标DN150，同时可适配美国ANSI B16.5法兰标准。
2. 标配一体式塑料安装底板，可选配铸铝底脚。
3. 配置高效电机，高效节能，使用寿命长。
4. 可在75℃介质条件下长期安全运行，适用于天然温泉水循环。
5. 适用于大型水上世界、海洋馆，大、中型游泳池等水循环过滤系统。

Feature

1. The import and export flange is of international DN 150, and it also adapts to American ANSI B 16.5 flange standard.
2. Integrated plastic mounting base plate is provided as standard, and cast aluminum foot is optional.
3. High efficient motor, Energy saving, Long durability.
4. Long safety operation under 75℃ medium; Applicable to natural Hot Spring water circulation.
5. Compatible to large aqua world, aquarium and large & middle size swimming pool.


工作条件

介质温度：0~75℃
环境温度：≤50℃
最大工作压力：0.7MPa

Working conditions

Medium temperature: 0~75℃
Environmental temperature: ≤50℃
Max. Working pressure: 0.7MPa

性能曲线 Performance curves

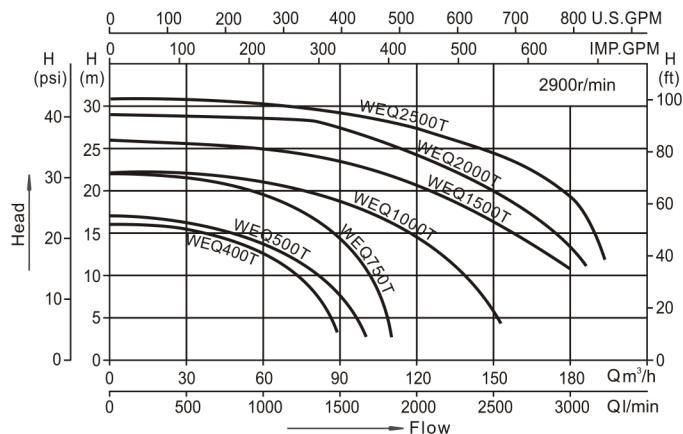

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (L/min)	最大扬程 Hmax (m)	输入功率 Power(P1) kW HP	电压/频率 (V/Hz)	电流 (Amps)	进出水口法兰 Inlet/outlet	包装尺码 Packing size (mm)
WEQ400T	1480	16	3.0 4	380/50	5.9	DN150(6")	760×425×610
WEQ500T	1680	17	4.0 5	380/50	6.8	DN150(6")	760×425×610
WEQ750T	1830	22	5.5 7.5	380/50	10.3	DN150(6")	760×425×610
WEQ1000T	2560	22	7.5 10	380/50	12.7	DN150(6")	760×425×610
WEQ1500T	3000	26	11 15	380/50	20.1	DN150(6")	850×425×610
WEQ2000T	3100	29	15 20	380/50	26.7	DN150(6")	850×425×610
WEQ2500T	3300	31	18.5 25	380/50	30.3	DN150(6")	850×425×610

