DUAL PUMP SEWAGE BOOSTER UNIT

GT-MAX

Sewage Booster Unit



APPLICATIONS


Designed for collecting and boosting wastewater in scenarios below:

- Basements, bathrooms, laundry rooms, kitchens, and other places below the backwater level
- Basement apartments and commercial spaces below the main sewer line
- Places where gravity drainage cannot reach the main sewer pipe
- Places that require wastewater boosting to a higher level


PRODUCT FEATURES

- Dual-pump automatic operation
- Made of high-strength, corrosion-resistant material, for long service life
- Dual-pump backup operation with automatic alternation
- High-efficiency motors, up to 600W per pump
- 10m power cable with plug (DN50/DN80 adaptable)
- Built-in non-return valves
- Smart controller with LCD display
- Multiple protections: overload, over-current, overheating, high water level alarm, etc.
- Wi-Fi remote monitoring system (optional)
- Multiple alarm methods: buzzer, app push, etc.
- Sealed structure, odor-proof and leak-proof
- Maximum head: 60m; Flow rate: up to 30m³/h
- Suitable for wastewater temperature up to 60°C
- Protection rating: IP68
- Continuous operation: 24 hours

DIMENSIONS

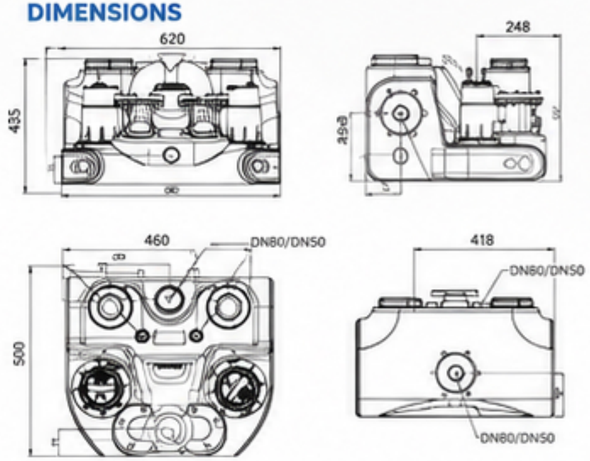

PERFORMANCE CURVE

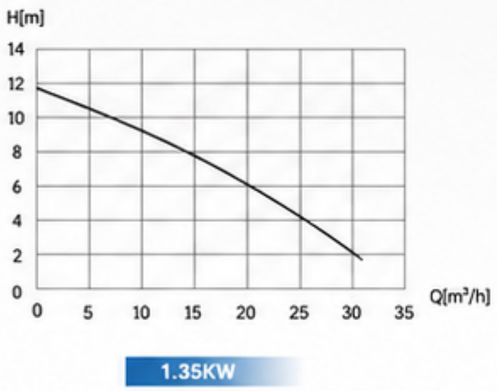

1.35KW

Max. Flow Rate: 30m³/h	Voltage: 220V	Rated Current: 6A
Max. Head: 11.5m	Inlet Diameter: 35mm	Rated Head: 10m
Power: 1.35KW	Outlet Diameter: DN80	Rated Flow Rate: 8m³/h

