



安装外形图 Overall dimension

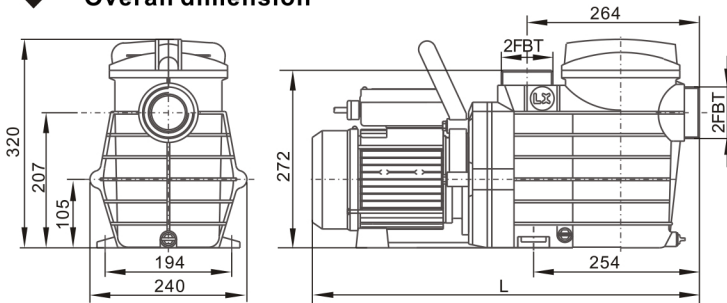

型号 Model	L
SUPB075	593
SUPB100	593
SUPB150	593
SUPB200	593
SUPB250	593
SUPB300	609
SUPA150	628
SUPA200-II	628
SUPA250-II	628
SUPA300-II	628

性能曲线 Performance curves

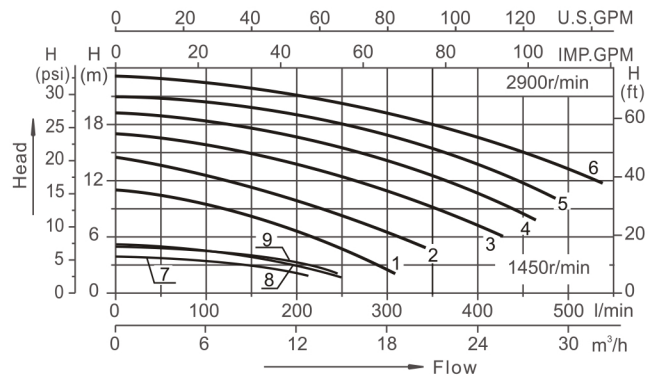

EN 60335-1: 2012+A11
EN 60335-2-41: 2003+A1+A2
EN 62233 : 2008
ZEK 01.4-08/11.11
ERP547 / 2012

SAA

AS/NZS60335.1
AS/NZS60335.2.41

SASO

IEC60335-2-41:2002 +A1:2004+A2:2009
IEC 60335-1:2001+A1:2004 + A2:2006
IEC 62233:2005

热保护器
Thermal protector

TI, USA

绝缘等级
Insulation

F

防护等级
Protection

IP55

最大吸程
Max Suction

1.5M




透视盖手柄可选配
Optional transparent cover handle

欧洲款
EUROPEAN TYPE

技术参数列表 Technical parameter list

型号 Model	最大流量 Qmax (l/min)	最大扬程 Hmax (m)	曲线 Curves	电压/频率 V/Hz	输入功率 Power(P ₁) kW	HP	电流 Amps	接头尺寸 Fitting size (mm)	毛重 G.W (Kg)	包装尺码 Packing size (mm)
SUPB075	290	10	1	220-240/50	0.55	0.75	3.2	60.3or63	14.6	635×275×380
SUPB100	380	13	2	220-240/50	0.75	1.0	3.8	60.3or63	16	635×275×380
SUPB150	420	17	3	220-240/50	1.1	1.5	5.2	60.3or63	17.3	635×275×380
SUPB200	465	19	4	220-240/50	1.5	2.0	7.0	60.3or63	19	635×275×380
SUPB250	480	21	5	220-240/50	1.85	2.5	8.6	60.3or63	20.8	635×275×380
SUPB300	540	23	6	220-240/50	2.2	3.0	10	60.3or63	22.3	650×275×380
SUPA150	420	18.5	3	220-240/50	1.1	1.5	5.2	60.3or63	20	670×275×380
SUPA200-II	215	4.5	7	220-240/50	(Low speed) 0.35	3/8	2.4	60.3or63	22	670×275×380
	465	19.5	4		(High speed) 1.5	2.0	7.0			
SUPA250-II	230	5	8	220-240/50	(Low speed) 0.4	1/2	2.8	60.3or63	24	670×275×380
	480	21	5		(High speed) 1.85	2.5	8.6			
SUPA300-II	250	5.5	9	220-240/50	(Low speed) 0.45	5/8	3.2	60.3or63	24.8	670×275×380
	540	23	6		(High speed) 2.2	3.0	10			

230V/60Hz Version on request



海水养殖循环过滤
Mariculture circulation filter



泳池循环过滤
Recirculation of water in swimming pool equipment

工作条件

介质温度: 5-50℃
环境温度: ≤50℃
最大工作压力: 0.3MPa

Working conditions

Medium temperature: 5-50℃
Environmental temperature: ≤50℃
Max. working pressure: 0.3MPa

序号 NO.	名称 Name	序号 NO.	名称 Name
1	接头螺母 Tie-in Nut	19	六角头螺栓 Hexagon bolt
2	接头 Tie	20	提手 Handle
3	O形圈 O-Ring	21	六角头螺栓 Hexagon bolt
4	泵壳 Pump Casing	22	电机 Motor
5	滤篮 Filter	23	胶条 Plastic strips
6	O形圈 O-Ring	24	底板 Base
7	透视盖 Transparent Cover	25	六角头螺钉和平垫圈组合件 Combination of hexagon head screw and washer
8	透视盖手柄 Transparent cover handle	26	O形圈 O-Ring
9	O形圈 O-Ring	27	螺塞 Plug
10	导叶 Guide plate		
11	叶轮活动口环 Impeller activity ring		
12	叶轮 Impeller		
13	机械密封 Mechanical seal		
14	O形圈 O-Ring		
15	泵盖 Pump Cover		
16	六角头螺钉 Hexagon screw		
17	过渡前端 Transition front		
18	平垫圈 Washer		

